


TYPICAL EROSION CONTROL MEASURES

Follow the minimum erosion control measures as shown below. Installation of erosion & sediment control measures, including a gravel construction drive shall be completed prior to any construction.

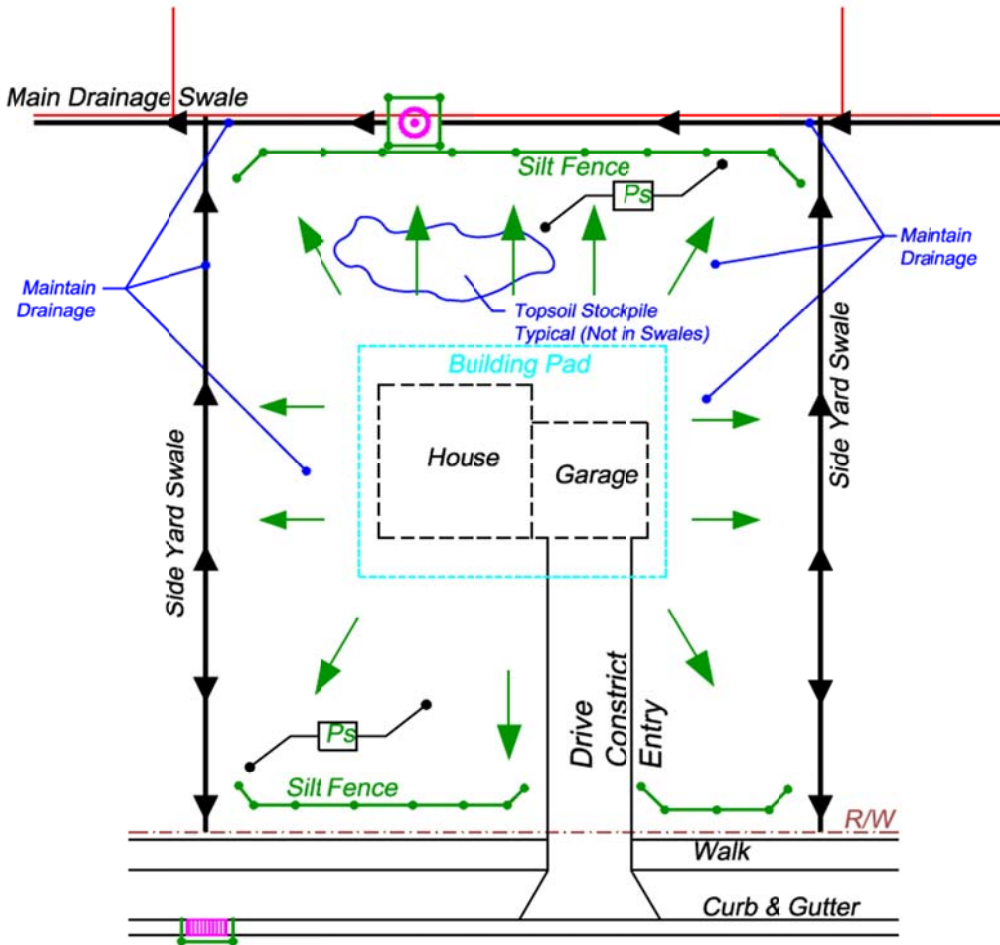

Developer must use concrete washout and solid waste area. To be 50 feet from any storm drains, open ditches, or water bodies. Once concrete is set, developer to break up and properly dispose concrete.

Note: This is for reference only. Installation is done by builders & not the responsibility of the developer.

Reference the City of Angola Erosion and Sediment Control Ordinance 1164-2004 for further information.